


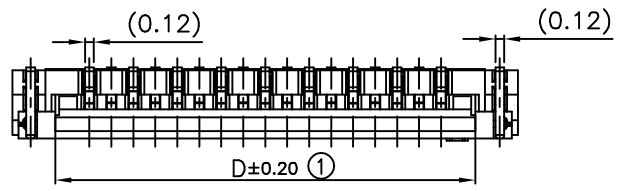

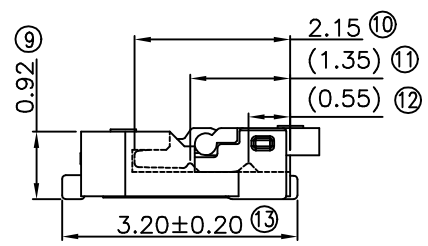


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		初版发行	06/21' 17

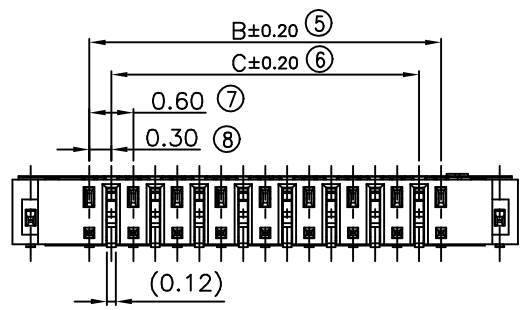


NOTES:

Insulator: LCP UL 94V-0(Color: Black)
 Actuator: LCP UL 94V-0(Color: Natural)
 Terminal: phosphor copper C5240 Plating:
 Gold plating at contact and solder
 area over all Ni 40u"min plating
 Fitting tab: Brass C2680 Plating:
 Matte Tin 80-200u"over all Ni
 40u"min plating
 Current Rating: 0.2A AC/DC
 Voltage Rating: 30V AC/DC Max
 Temperature Range: -55°C~+85°C
 Contact Resistance: 100 mΩ Max
 Insulation Resistance: 50 MΩ Min
 Withstanding Voltage: 90V AC/minute

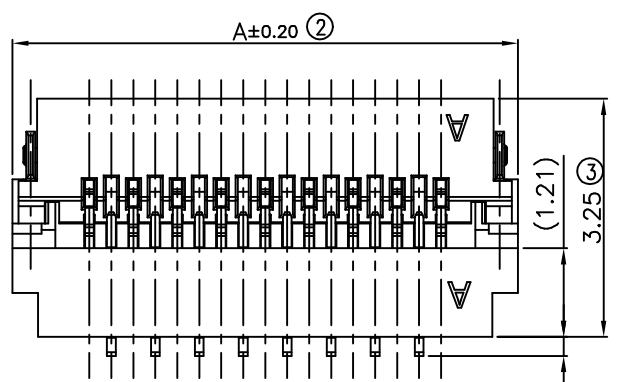

GENERAL TOLERANCE		DRAWN	ryan	06/21'17	SCALE	PART NO.	1F03008***C03-**
X.±0.30	x.'±1°	CHECKED	qunyu.li	06/21'17	21/1	TITLE	0.3 FPC CONN
.X±0.25	.x'±0.1°	APPROVED	Sky.he	06/21'17	UNITS	mm	成品SPEC图
.XX±0.20		File NO.	F0300801S				
.XXX±0.10		REV.	蘇州祥龍嘉業電子有限公司 Goldenconn Electronic Technology Co.,LTD				
SHEET	1/2	Q'TY					

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		初版发行	06/21' 17

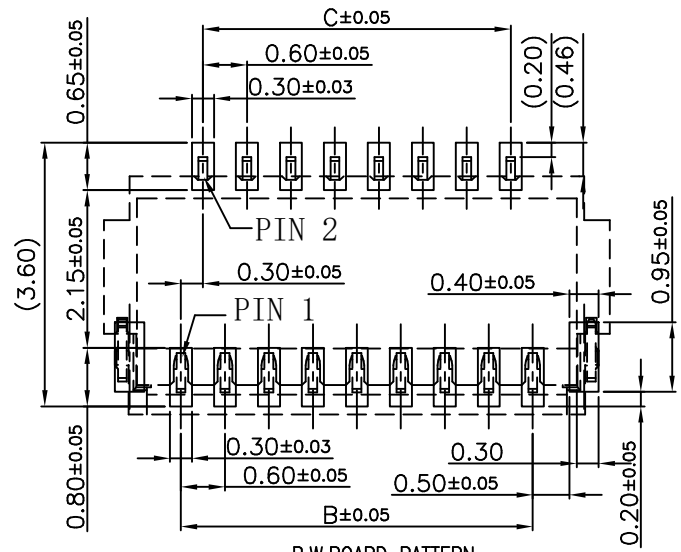


P.W. BOARD PATTERN
RECOMMENDED METAL MASK THICKNESS 0.1mm

Gold plating ——— 1F03008 * ** C 0 3 -**
H:3u" min
E:4u" min
PIN number ———

00:Rohs
HF:HALOGEN FREE
Reel packing
Natural color

No. of Contacts	Dimension						
	A	B	C	D	E	F	G
7	3.90	1.80	1.20	2.73	3.40	2.70	2.10
9	4.50	2.40	1.80	3.33	4.00	3.30	2.70
11	5.10	3.00	2.40	3.93	4.60	3.90	3.30
13	5.70	3.60	3.00	4.53	5.20	4.50	3.90
15	6.30	4.20	3.60	5.13	5.80	5.10	4.50
17	6.90	4.80	4.20	5.73	6.40	5.70	5.10
19	7.50	5.40	4.80	6.33	7.00	6.30	5.70
21	8.10	6.00	5.40	6.93	7.60	6.90	6.30
23	8.70	6.60	6.00	7.53	8.20	7.50	6.90
25	9.30	7.20	6.60	8.13	8.80	8.10	7.50
27	9.90	7.80	7.20	8.73	9.40	8.70	8.10
29	10.50	8.40	7.80	9.33	10.00	9.30	8.70
31	11.10	9.00	8.40	9.93	10.60	9.90	9.30
33	11.70	9.60	9.00	10.53	11.20	10.50	9.90
35	12.30	10.20	9.60	11.13	11.80	11.10	10.50
37	12.90	10.80	10.20	11.73	12.40	11.70	11.10
39	13.50	11.40	10.80	12.33	13.00	12.30	11.70
41	14.10	12.00	11.40	12.93	13.60	12.90	12.30
43	14.70	12.60	12.00	13.53	13.80	13.50	12.90
45	15.30	13.20	12.60	14.13	14.40	14.10	13.50
47	15.90	13.80	13.20	14.73	15.00	14.70	14.10
49	16.50	14.40	13.80	15.33	15.60	15.30	14.70

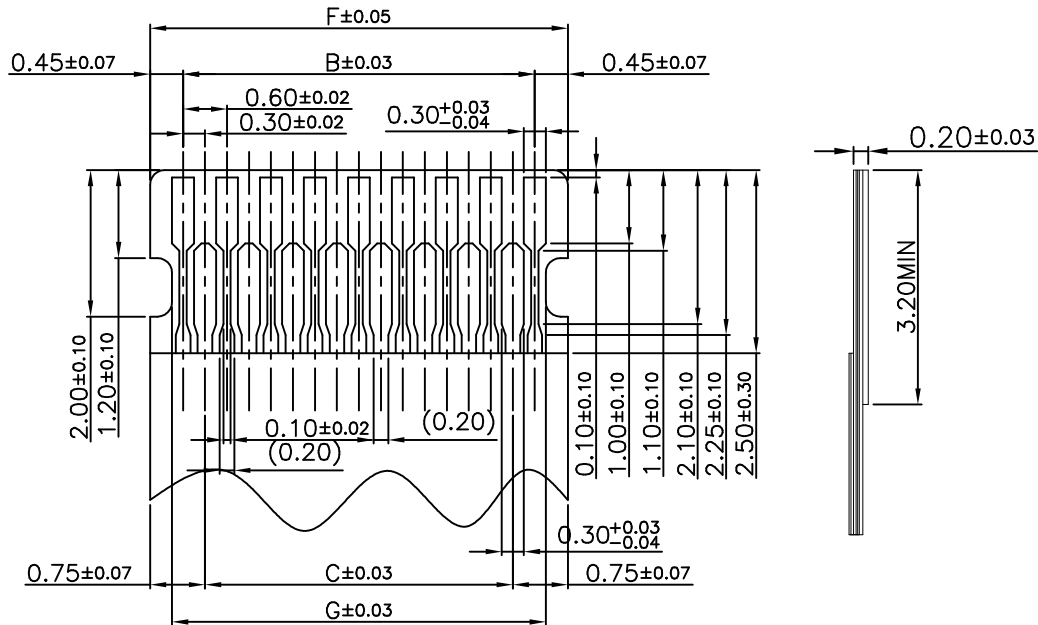

GENERAL TOLERANCE		DRAWN	ryan	06/21'17	SCALE	PART NO.	1F03008***C03-**
X.±0.30	x.'±1'	CHECKED	qunyu.li	06/21'17	21/1	TITLE	0.3 FPC CONN
.X±0.25	.x'±0.1'	APPROVED	Sky.he	06/21'17	UNITS	mm	成品SPEC图
.XX±0.20		File NO.	F0300801S				
.XXX±0.10		REV.					
SHEET	2/2	Q'TY	1	A	蘇州祥龍嘉業電子有限公司 Goldenconn Electronic Technology Co.,LTD		